

MAX On-The-Go/700



Secure and Fast Internet or VPN Connections Anywhere You Work.



Turbocharged Mobile Access. Anytime. Everywhere.

The Pepwave MAX On-The-Go/700 bonds the bandwidth four 4G LTE/3G USB modems using SpeedFusion™ technology to deliver secure and fast Internet or VPN connections anywhere. You can even create your own hotspot or boost your bandwidth with available Wi-Fi connections, making the MAX On-The-Go/700 the ultimate mobile connectivity solution.



SpeedFusion Bandwidth Bonding* and Seamless Failover

SpeedFusion bandwidth bonding technology bonds all connected bandwidth into a single superfast stream, using the same or different cellular providers.

Works With



See a list of supported modems at peplink.com/modem



Unparalleled Modem Compatibility

Supports 250+ USB cellular modems from more than 100 carriers. You can plug in and start surfing instantly. But if not, just connect your modem and turn on Remote Assistance – our engineers will get right to work on adding support for your modem.



Central Management

InControl 2 is our cloud based device management, monitoring, and reporting tool. Manage your network with ease using the InControl 2.



Customize Captive Portal

Branding your captive portal is as easy as uploading your logo and terms & conditions. You can easily set bandwidth allowance and access duration per user or manage access using RADIUS.



Certified Toughness

In addition to rugged metal enclosure, MAX 700 has certifications on:
Shock and vibration resistance (EN 61373:1999, IEC 61373:1999)
Railway applications (EN 50155)
Electromagnetic Compatibility (EN 61000)

* Available on MAX 700 only.



Application

First Responders – Unbreakable VPN for Mission-Critical Emergency Communication

- 2 Unbreakable VPN powers uninterrupted communication and resource access

- 4 In case of a WAN failure, **SpeedFusion** instantly and seamlessly switches traffic to another connection; for always-on communication

- 3 **SpeedFusion** allows you to communicate using combined bandwidth from all available connections

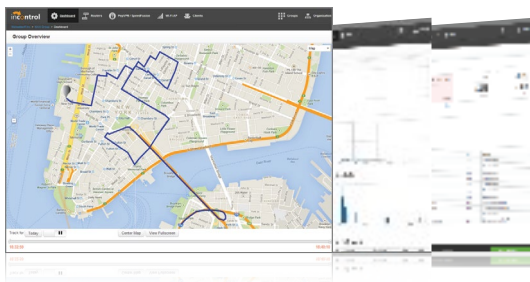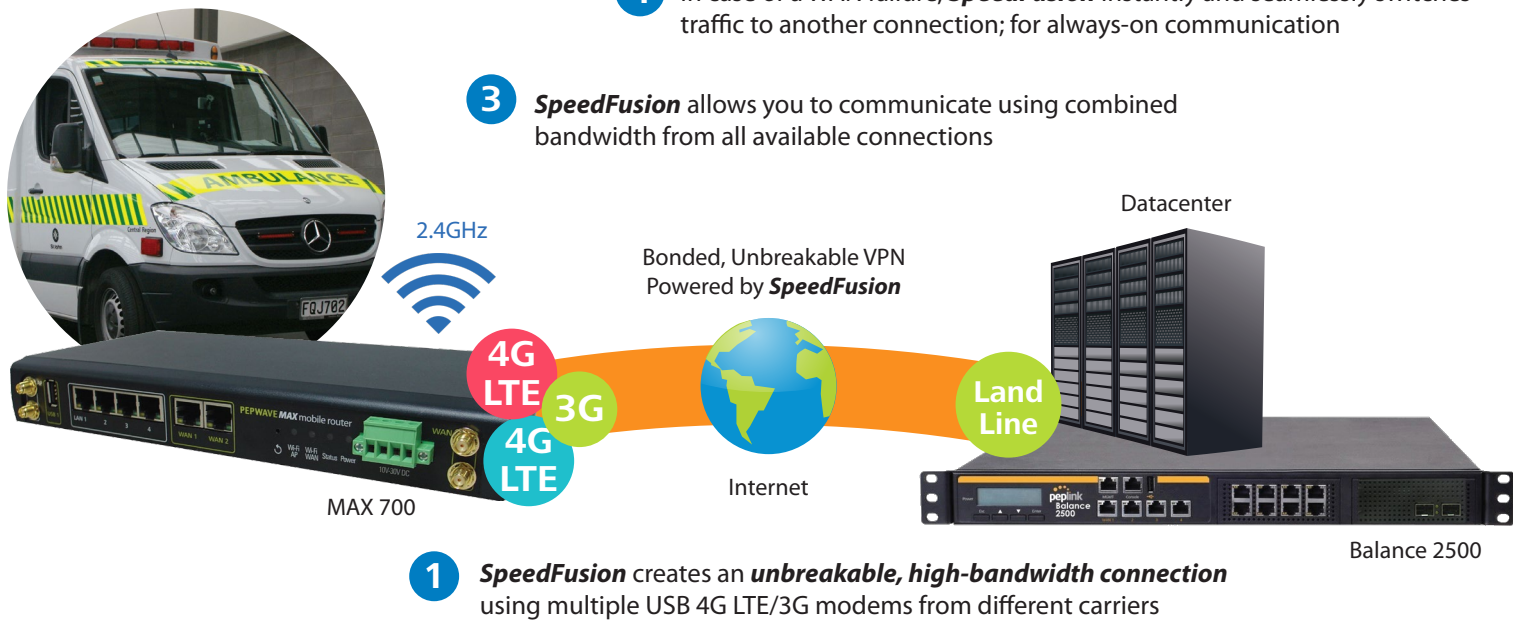


InControl²

Setup. Manage. Report.

- 5 InControl 2 provides complete cloud-based device management, monitoring, and reporting.

SMBs – Landline Alternative for Construction Site and Remote/Temporary Workstation

- 3 With MAX 700's built-in AP Controller, you can extend your Wi-Fi coverage with AP One, configure and get detailed access point usage reports anytime, right from your MAX 700

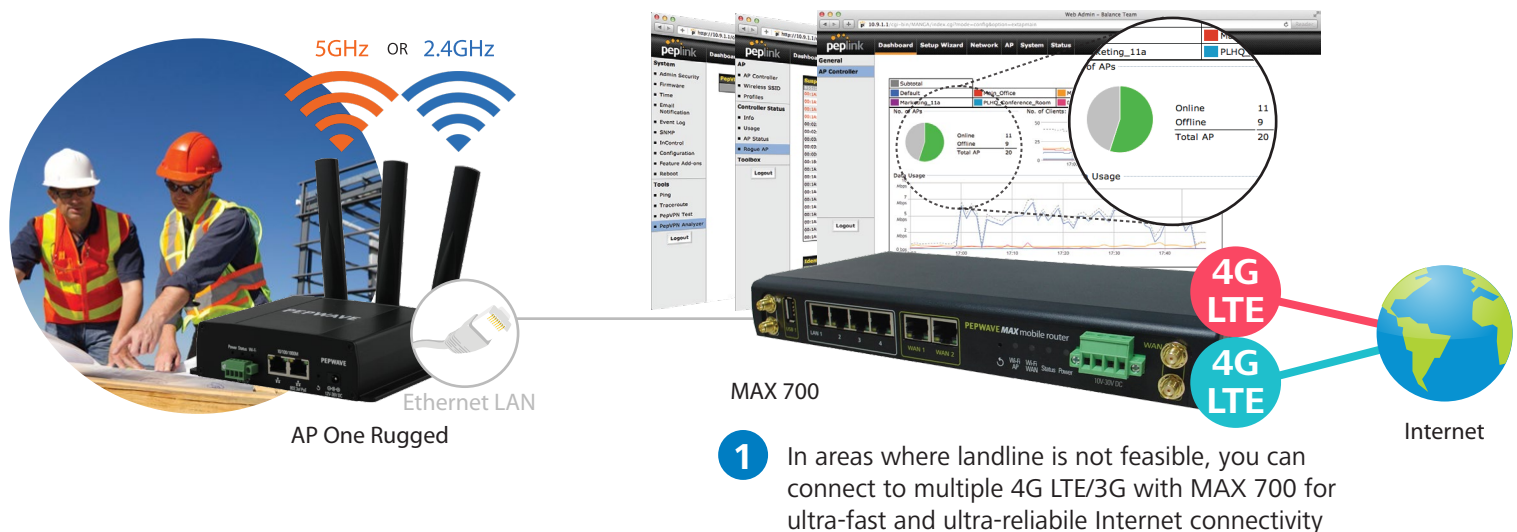


The AP One is available in a variety of configurations. Whether you need Wi-Fi in a single conference room or across a large outdoor area, there's an AP One model built for the job. Visit peplink.com/ap-one for details.



Broadcasting and Media – Blazing Fast Video Broadcast on Multiple 4G LTE/3G Links

- 2 Unbreakable VPN delivers fast and fluid video streaming
- 3 **SpeedFusion** allows you to transfer video using bandwidth from all available connections
- 4 In case of a WAN failure, **SpeedFusion** instantly and seamlessly switches traffic to another connection; for ultra-reliable video streaming

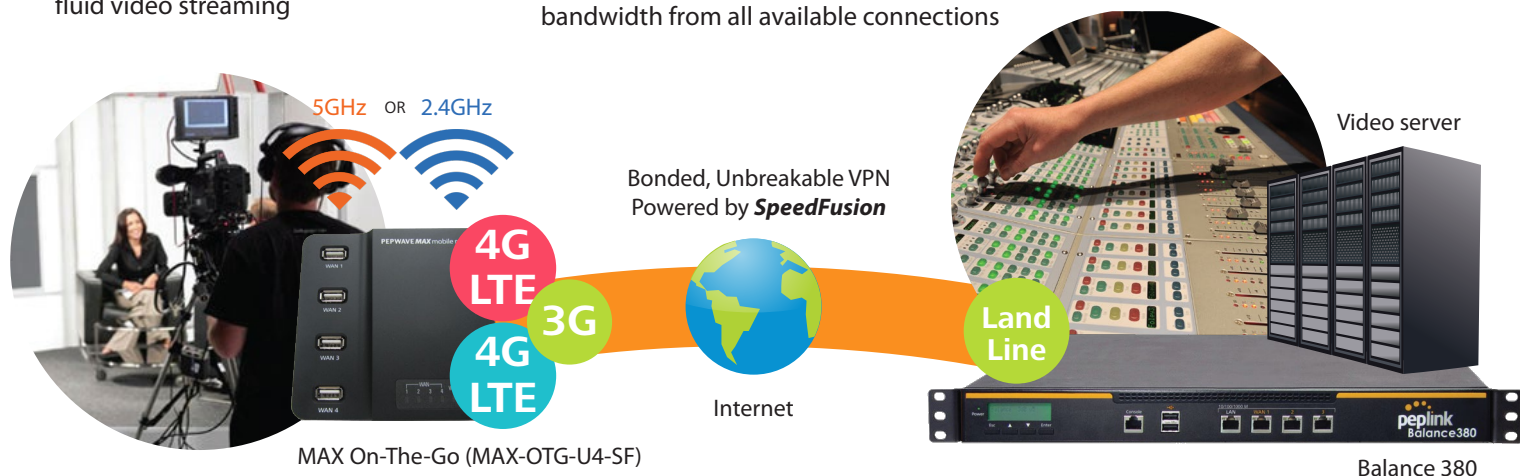


- 1 **SpeedFusion** creates an **unbreakable, high-bandwidth connection** using multiple USB 4G LTE/3G modems from different carriers

Hardware

MAX On-The-Go



MAX 700

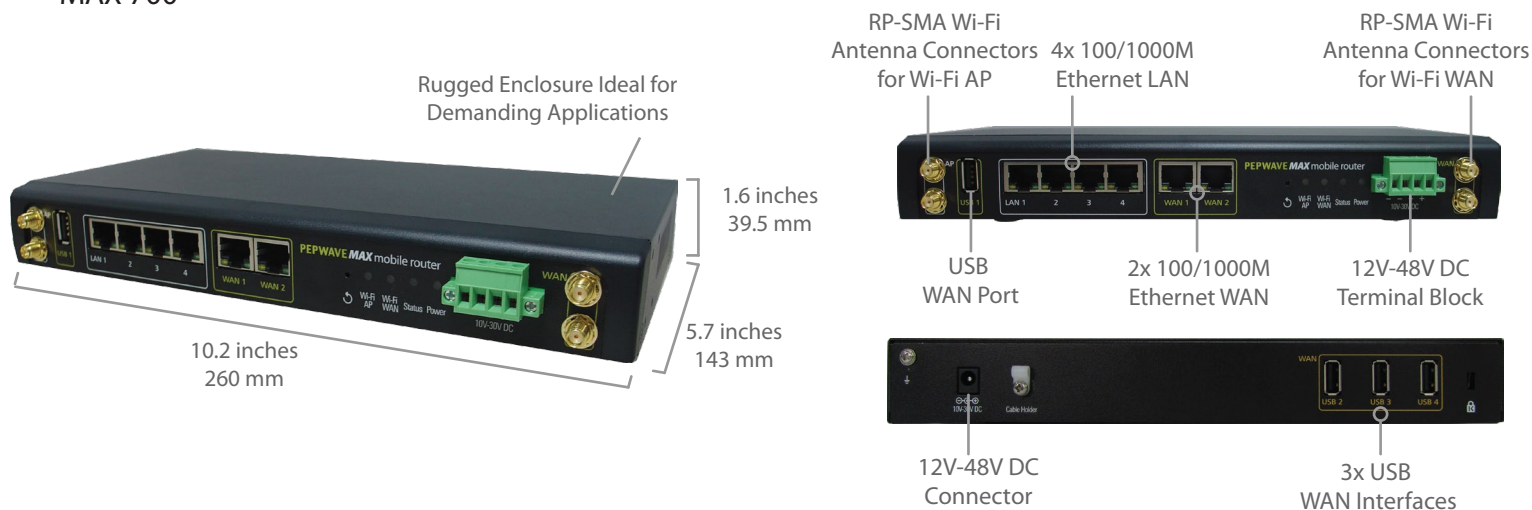

Specifications

	MAX On-The-Go	MAX 700
WAN Interface	4x USB Interfaces 1x 10/100M Ethernet Port	4x USB Interfaces 2x 100/1000M Ethernet Ports
LAN Interface	1x 10/100M Ethernet Port	4x 100/1000M Ethernet Ports
W-Fi Interface	1x 802.11a/n or b/g/n 150Mbps Wi-Fi WAN and/or AP	802.11a/b/g/n 300Mbps Wi-Fi WAN 802.11ac/a/b/g/n 866Mbps Wi-Fi AP
Wi-Fi AP Operating Frequency	2412 – 2472 MHz or 5180 – 5825 MHz	2412 – 2472 MHz and 5180 – 5825 MHz
Simultaneous Dual-Band Wi-Fi AP	○	●
Router Throughput	100Mbps	200Mbps
Recommended Users	1-25	25-150
PepVPN	●	●
SpeedFusion Hot Failover	●	●
SpeedFusion WAN Smoothing	● #	●
SpeedFusion Bandwidth Bonding	○	●
Number of PepVPN/SpeedFusion Peers	2	2/20 +
PepVPN/SpeedFusion Throughput (no encryption)	40Mbps	100Mbps
PepVPN/SpeedFusion Throughput (256-bit AES)	20Mbps	60Mbps
Wi-Fi Antenna	Integrated 1dBi Omni Antenna Switchable to RP-SMA Connector for External Wi-Fi Antenna	4x RP-SMA Connectors
Enclosure	Low-Profile, All-Purpose	Indoor Metal
Dimension	1.2 x 4.3 x 4.3 inches 30 x 110 x 110 mm	1.6 x 10.2 x 5.7 inches 39.5 x 260 x 143 mm
Weight	0.43 pounds 195 grams	2.65 pounds 1.2 kg
Power Input	Device: 10V – 24V DC AC Adapter: AC Input 100V – 240V, DC Output 12V, 2A	Device: 12V – 48V DC, 3A AC Adapter: AC Input 100V – 240V / DC Output 12V Terminal Block: 12V – 48V DC, 3A
Power Consumption	20W (max.)	28W (max.)
Power Output	○	Up to four 802.3af PoE Outputs*
Operating Temperature	-14° – 149°F -10° – 65°C	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)	
Certifications	FCC, CE, RoHS	
RF Port Lighting Immunity: ITU-T K.20 (+/- 1.5 kV)	○	●
Shock and Vibration Resistance: EN 61373:1999 IEC 61373:1999	○	●
Warranty	1-Year Limited Warranty	

*Feature is available only on MAX-OTG-U4-SF. *PoE Activation Kit is available separately. + The MAX 700 comes with 2 PepVPN/SpeedFusion peers by default. With an optional add-on, it supports up to 20 peers.

Features

WAN Support for PPPoE, Static IP, DHCP WAN Link Health Check Bandwidth Allowance Monitor USB 4G/3G Modem Support IPv6 Support* Support for Dynamic DNS services WAN Port Convertible into LAN Port*	Load Balancing* Intelligent Failover Session Persistence Per-Service Load Distribution Multiple Algorithms Complete VPN Solution PepVPN/SpeedFusion Hot Failover*/ SpeedFusion Bandwidth Bonding* Site-to-Site VPN Bandwidth Aggregation* Hot Failover* 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing X.509 Certificate Support* IPsec VPN (Network-to-Network) X.509 Certificate Support*	Advanced QoS User Groups Bandwidth Reservation* Individual Bandwidth Limit* Application Prioritization By User Groups* SIP, HTTPS, VPN QoS Custom Application QoS Captive Portal Support* Support for Wired and Wireless LAN Clients Support for RADIUS Authentication Support for LDAP Authentication* Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page Certification FCC, CE, RoHS Shock and Vibration Resistance* RF Port Lightning Immunity*	Networking NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP WINS Server* VRRP HA support* Security Stateful Firewall DoS Prevention Web Blocking Web Filtering Blacklists
---	---	---	--

*Available on selected models.

Product Ordering Information

MAX On-The-Go

Product Code	Description
MAX-OTG-U4	Quad-USB 4G LTE/3G router. Supports PepVPN and quad-WAN load balancing & failover. Upgradable to MAX-OTG-SF with license key.
MAX-OTG-U4-SF	Quad-USB 4G LTE/3G router. Supports PepVPN, SpeedFusion HotFailover, SpeedFusion WAN Smoothing and quad-WAN load balancing & failover.

MAX 700

Product Code	Description
MAX-GN2-R	Quad-USB 4G LTE/3G router. Supports 200+ USB 4G LTE / 3G modems from mobile carriers including Verizon, AT&T, T-Mobile, Sprint, and worldwide carrier. Supports PepVPN, SpeedFusion HotFailover, SpeedFusion Bandwidth Bonding and quad-WAN load balancing & failover.